



# LR65

LONG REACH

Cat® 323 NG

# ABOUT THE LONG REACH SERIES

## APPLICATIONS:

- **Long Reach**, the longest reach drill rig of its class in the market.
- Conversion to **Long Mast** and **Short Mast** options available.

## BASE:

- **The new Cat® 323 Next Gen** is a purpose-built machine powered by a fuel-efficient U.S. EPA **Tier 4 Final** C7.1 ACERT engine.
- Equipped with **CAT Vision Link** that allows management to monitor machine operations and maintenance data online and wireless, providing information such as location, hours, fuel usage, idle time, event codes and maintenance schedule.

## UNDERCARRIAGE:

- Caterpillar **variable undercarriage** VH3830/3675/600. Reinforced frame H style variable undercarriage.

## MAST:

- Reinforced mast, with high resistance steel **Weldox 700**.

## ROTARY:

- **Robust design**, with 2 slewing bearings on top and bottom, robust pinion and main gear.
- Anti-cavitation and anti-shock system for longer hydraulic motor life.
- **1 group of Hydraulic Motor / Planetary Gear** for high torque, high speeds and long life.
- Cooling system for hydraulic motors and gearboxes.
- Power-shift for **High spin-off speed (140rpm)** for quick discharge of soil.
- **3 operation speeds** and 3 spinoff speeds. For high torque and high speeds.
- **Automatic gear shifting**, for seamless operation, high production.
- **Exchangeable keys**, bolted. No need to rebuild keys by welding inside the rotary.
- Hydraulic measurement of torque displayed in the cabin for the operator.

## MAIN WINCH:

- **Special groove** for better cable winding and longer cable life.
- Press-roller included.
- **2 gears** allows for both **high speed** and **high pulling force**.
- **Automatic gear shifting**, for seamless operation, high production.
- Automatic down the hole winch stop. When Kelly bar reaches the bottom of the hole, winch automatically stops.
- Freewheeling winch during crowd operation.
- Hydraulic and mechanical brake.
- Hydraulic measurement of pulling force displayed in the cabin for operator.

## KELLY BAR:

- Large inner passage on rotary allows for **large diameter pipes** (16in) and **thicker keys**.
- Thick Keys made of Wear resistant materials – **Hardox 450**.



## CAB:

- AM/FM Radio, Air conditioning/Heating
- ROPS cab
- Top protection
- LCD monitor for Engine and Hydraulics computer, with diagnostic system

## CONTROL SYSTEM:

- Touch Screen Display
- Measurements:
  - Torque and rotary speeds
  - Drilling depth
  - Mast inclination X/Y axis
  - Main Winch pulling force
  - Crowd force
- Automatic functions:
  - Auto-level of mast
  - Rotary automatic gear shifting
  - Main Winch automatic gear shifting
  - Drill Lock
  - Auto Crowd
  - Return to Center
- Maintenance and data logging

## ACCESSORIES:

- Lighting package
- Refueling pump
- Cold weather start up package
- Fine filtration system
- Tool & O'ring kits

# TECHNICAL SPECIFICATIONS

## KELLY BAR SHORT MAST APPLICATION

Drilling Depth (5 elements; interlock kelly bar)*	55 ft	16,760 mm
Maximum Drilling Depth (Interlocking bars)	80 ft	24,380 mm
Maximum Drilling Depth (Friction bars)	100 ft	30,480 mm
Drilling Diameter	9 ft	2,750 mm

\*For longer bars, mast extension is required.

## ROTARY HEAD - RT 406-9

Max. torque (nominal)	67,150 ft.lbs	9,310 kg.m
Working speed of rotation	22 – 36 rpm	22 – 36 rpm
Spin-off rotation	95 - 140 rpm	95 - 140 rpm

## CROWD SYSTEM

Cylinder stroke - short mast	6 ft 3 in	1,920 mm
Cylinder push force	27,000 lbf	12,300 kgf
Cylinder push speed	128 ft/min	33 m/min
Cylinder pull force	39,600 lbf	18,000 kgf
Cylinder pull speed	118 ft/min	36 m/min

## MAIN WINCH

Max. pull-force - 1st Layer (effective)	27,120 lbf	12,330 kgf
Line speed - 1st Layer	310 ft/min	94 m/min
Cable diameter	3/4 in	20 mm
Drum diameter - 1st Layer	15.75 in	400 mm

## AUXILIARY WINCH

Max. pull-force - 1st Layer (effective)	14,300 lbf	6,500 kgf
Cable diameter	5/8 in	16 mm
Drum diameter - 1st Layer	10.2 in	260 mm

## MAST INCLINATION

Backward	15°	15°
Forward	10°	10°
Sideways	12° / 12°	12° / 12°

## DIESEL ENGINE CAT323 NEXT GEN (CAT® C7.1 ACERT™)

Net Power – SAE J1349	172 hp	128 kW
Displacement	428 in <sup>3</sup>	7.1 L
Fuel Tank	86.6 gal	345 L



## HYDRAULIC SYSTEM

Hydraulic pressure	5,076 psi	350 bar
Flow rate (main circuit)	2x56.5 gal/min	2x214.5 L/min
Hydraulic oil tank capacity	30.4 gal	115 L
Flow rate (auxiliary circuit)	26.5 gal/min	100 L/min

## UNDERCARRIAGE

Track length	15 ft 4 in	4,650 mm
Length to center of rollers	12 ft 7 in	3,830 mm
Transport position width (retracted)	8 ft 4 in	2,540 mm
Working position width (extended)	12 ft 1 in	3,675 mm
Shoes width	23.6 in	600 mm
Max. drawbar pull (both tracks)	46,085 lbf	20,500 kgf
Max. travel speed	1.93 mph	3.1 km/h

## TRANSPORT


Transport height	9 ft 6 in	2,890 mm
Length	37 ft 2 in	11,330 mm
Transport width	8 ft 4 in	2,540 mm
Transport weight (standard kelly 5 / 55 ft)	80,000 lb	36,300 kg

## GENERAL DATA


Overall height (boom in)	30 ft 3 in	9,225 mm
Overall height (boom out)	16 ft 6 in	5,050 mm
Operating weight	80,000 lb	36,300 kg




# GENERAL DIMENSIONS SHORT MAST

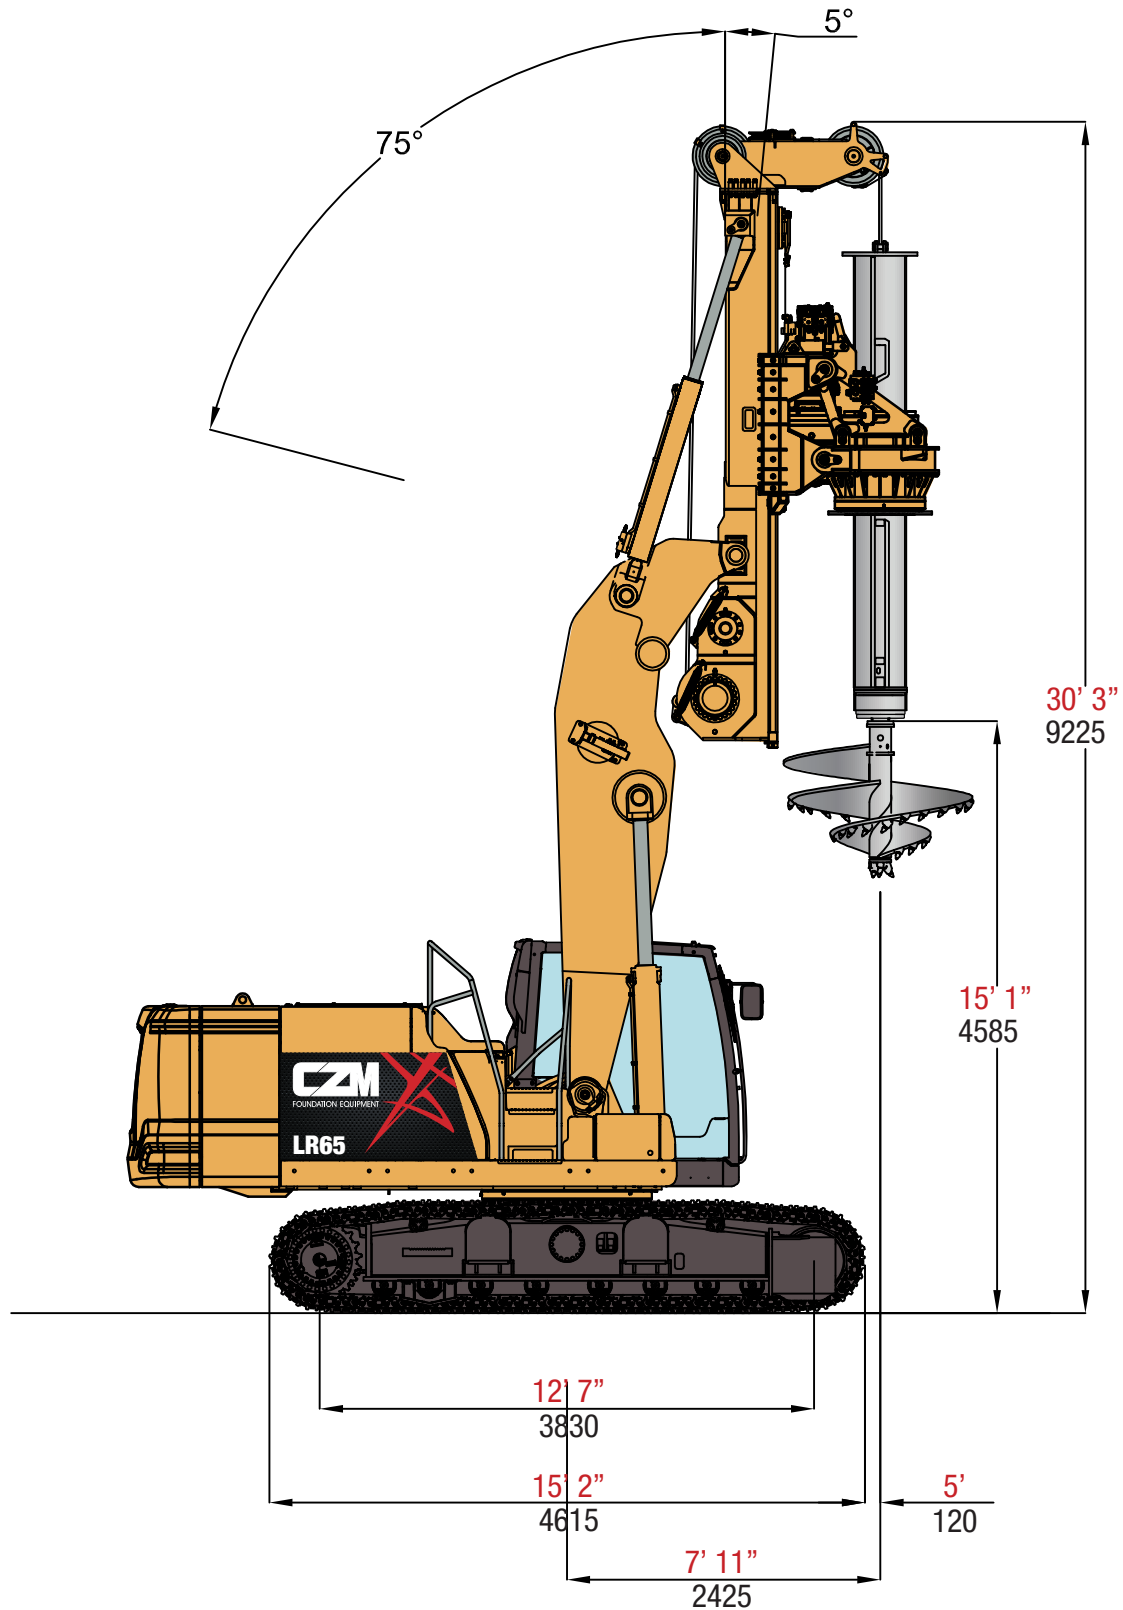

# GENERAL DIMENSIONS SHORT MAST

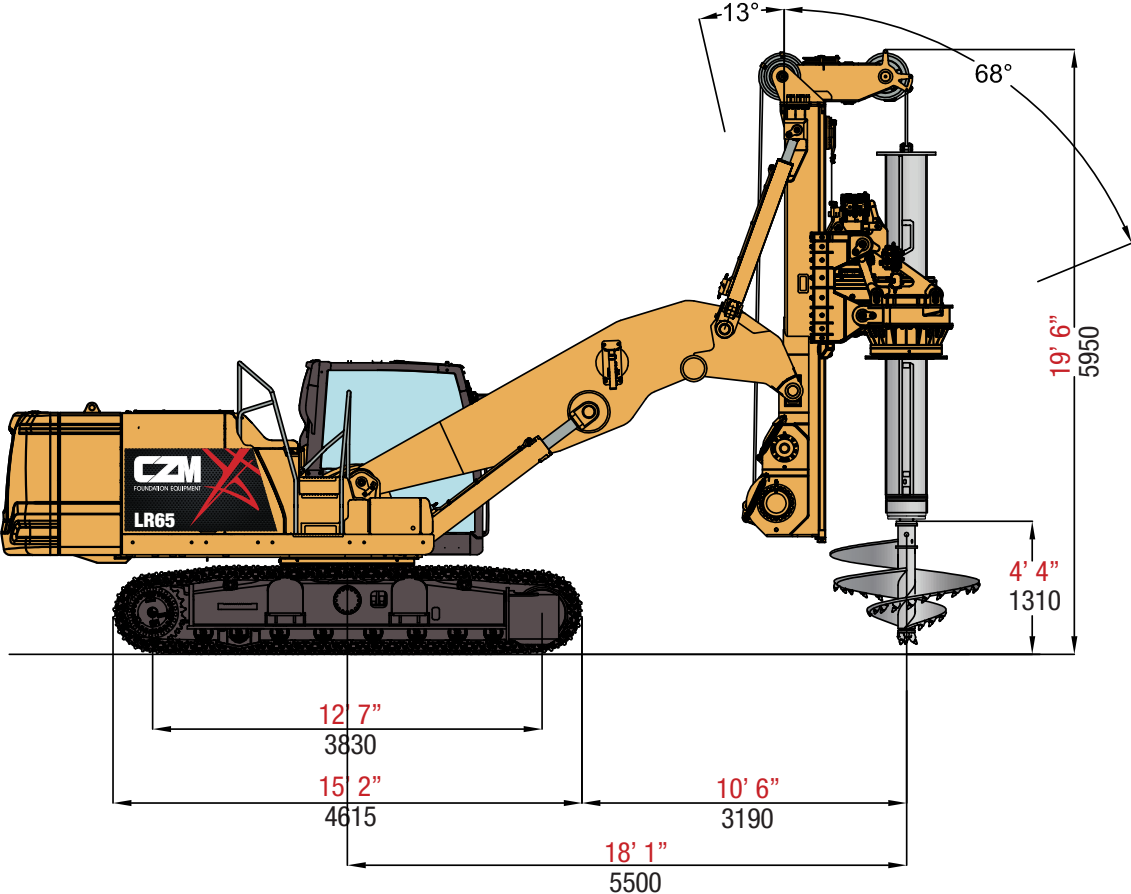

# TRANSPORT POSITION GENERAL DIMENSIONS

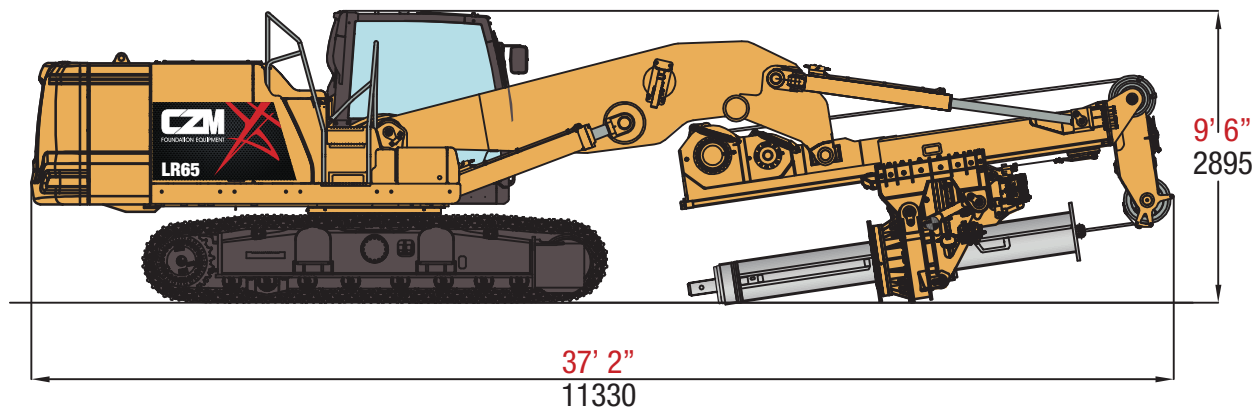

## KELLY BAR OPTIONS FOR LR65

	<b>NUMBER OF ELEMENTS</b>	<b>DEPTH - DPT</b>	<b>CLOSED LENGTH</b>	<b>WEIGHT</b>
5/40 Interlock	5	40' / 12.2m	14' 2" / 4.3m	5,900lbs / 2,700kg
5/55 Interlock	5	55' / 16.8m	15' 2" / 4.6m	8,300lbs / 3,800kg
5/65 Interlock	5	65' / 19.8m	17' 2" / 5.2m	9,500lbs / 4,300kg
5/80 Interlock	5	80' / 24.4m	20' 2" / 6.1m	11,600lbs / 5,270kg
5/65 Friction	5	65' / 19.8m	17' 2" / 5.2m	9,300lbs / 4,220kg
5/80 Friction	5	80' / 24.4m	20' 2" / 6.1m	11,400lbs / 5,180kg

# LR65

Mounted on  
Cat® 323  
(NEXT GEN)



## SCAN QR CODE

To view a video  
of the LR65.





FOUNDATION EQUIPMENT

## ▲ THE COMPANY

CZM is headquartered in Savannah, Georgia, USA. For over 40 years, we have specialized in manufacturing foundation equipment. We design and customize models for many different drilling applications including Drill shafts, CFA/cased CFA, Micropile and anchoring, driven pile and hydraulic hammers and soil improvements. We are a Caterpillar OEM (Original Equipment Manufacturer).

### HEADQUARTERS

962 Interstate Centre Boulevard  
Ellabell • Georgia • 31308  
United States • Phone: (912) 200-7654

### AFTER SALES - CALIFORNIA

1720 N. Ventura Avenue  
Ventura • California • 93001  
United States • Phone: (805) 667-8416

### AFTER SALES - GEORGIA

145 East Industrial Boulevard  
Pembroke • Georgia • 31321  
United States • Phone: (912) 200-7656

### AFTER SALES - KENTUCKY

2001 West Hal Rogers Parkway  
London • Kentucky • 40741  
United States • Phone: (912) 320-2699

### AFTER SALES - TEXAS

2501 Blue Mound Rd. W  
Haslet • Texas • 76052  
United States • Phone: (817) 232-8053

[WWW.CZM-US.COM](http://WWW.CZM-US.COM)    

Specifications are subject to change without notice.